


**LEVEL GAUGE FACE TYPE**

**FLUDEN**

- 'O' RING TYPE CONSTRUCTION
- 5 SIZE 3", 4", 5", 6" & 10" BETWEEN BOLT CENTERS
- FOR NON PRESSURISED TANKS ONLY
- CAN BE MOUNTED ON TAPPED HOLES
- SUITABLE FOR MINERAL / PETROLEUM BASED OILS FOR POLY CARBONATE
- MAXIMUM TEMPERATURE 80° C
- TRANSPERENT POLYMIDE MATERIAL IS AVILBLE FOR USE WITH MINERAL/PETROLEUM & WATER BASED FLUIDS. ANY CONTACT WITH ALCOHAL OR SOLVENTS MUST BE AVOIDED .

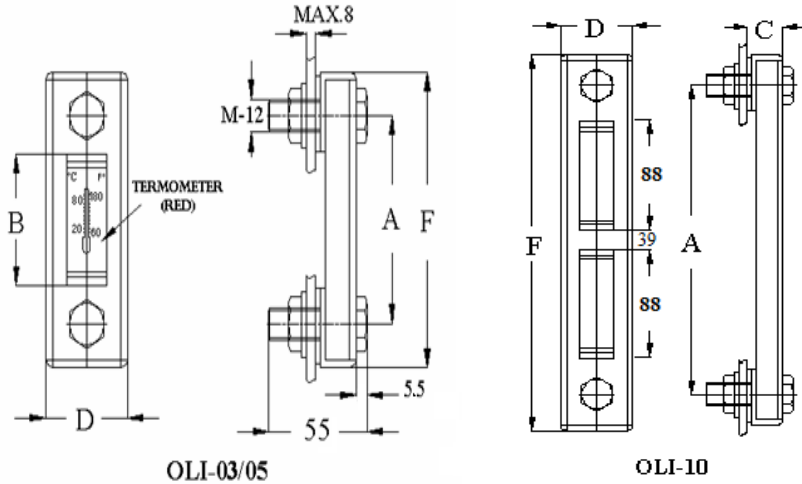

MODEL	A	B	C	D	F	WT KGS
OLI - 03	76.2	37	21	37	109	0.16
OLI - 05	127.5	88	21	37	161.	0.18
OLI - 10	254.0	215	21	37	286.5	0.28
OLI - 04	101.6	63	21	36	135.0	
OLI - 06	152.4	115	21	36	186.0	

\* Tolerance:  $\pm 1$  MM

OLI SERIES	5 INCH SIZE	T FEATURE OPTIONAL #	M 10 FEATURE SPECIAL #
	03 - 3"		M 12 - STD (M12 X 1.75 BOLT)
	04 - 4"		M 10 - SPECIAL (M12 X 1.50 BOLT) ( OMIT IF NOT REQD)
OLI	05 - 5"	T - THERMOMETER	(M12 X 1.50 BOLT) ( OMIT IF NOT REQD)
	06 - 6"		
	10 - 10"		

# OPTIONAL / SPECIAL FEATURE – OMIT IF NOT REQUIRED

**DIMENSIONS IN MM FOR REFERENCE ONLY**

