
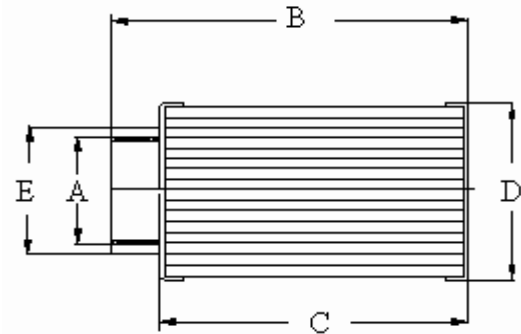


## BIG STRAINER

- REUSABLE SS 100 MESH / 149 MICRON STD
- STURDY ALL METAL STEEL CONSTRUCTION
- CONTINUOUS SPECIAL COMPOUND
- MAX. WORKING TEMP. 80 ° C.
- SUITABLE FOR HYDRAULIC / MINERAL OIL
- FLEXIBLE MAGNETIC WRAP AVAILABLE

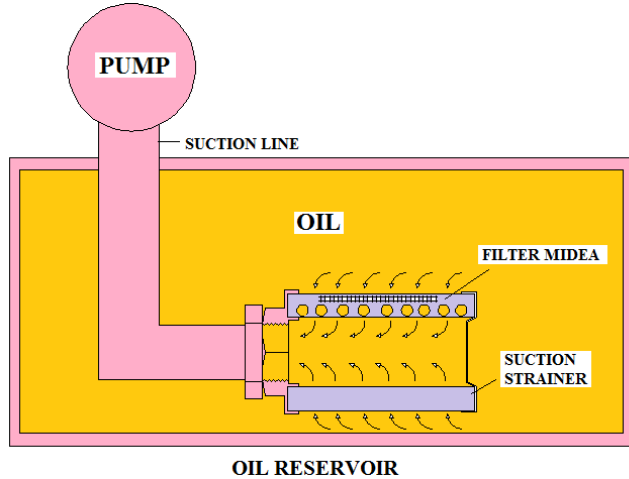

| MODEL NO   | FLOW<br>LPM | THREAD<br>SIZE<br>A | OVERALL<br>LENGTH<br>B | C TO C<br>LENGTH<br>C | DIA<br>CAP<br>D | NUT<br>DIA<br>E | SCREEN<br>AREA<br>(SQ. IN) | WT.<br>KGS. |
|------------|-------------|---------------------|------------------------|-----------------------|-----------------|-----------------|----------------------------|-------------|
| SC 2 - 200 | 800         | 4"                  | 295                    | 220                   | 200             | 125             | 965                        | 4.2         |
| SC 2 - 300 | 1200        | 4"                  | 381                    | 306                   | 200             | 125             | 1370                       | 4.5         |
| SC 2 - 400 | 1600        | 4"                  | 462                    | 387                   | 200             | 125             | 1740                       | 4.8         |
| SC 2 - 600 | 2400        | 4"                  | 615                    | 540                   | 200             | 125             | 2430                       | 5.4         |

### Note :-

\*Suction strainer flow handling capacity is recommended 3 to 4 times greater than pump flow handling capacity.

\* Tolerance:  $\pm 1$  MM

**MODEL CODE** : ASSEMBLY

| S C 2  | 010  |                            |                                     | -149   |
|--------|------|----------------------------|-------------------------------------|--|
| SERIES | SIZE | PORT THDS.<br>SIZE         | PORT THDS.<br>CONNECTION            | MICRONS<br>OPTIONAL #  |
| SC2    |      | REFER TABLE<br>OMIT OF STD | B - BSP - STD<br><br>N-NPT OPTIONAL | 149 - SS 100 MESH STD<br>125 - SS 120 MESH<br>100 - SS 150 MESH<br>074 - SS 200 MESH<br>063 - SS 250 MESH<br>Also - 30 / 60 MESH |

OMIT IF STANDARAD

CONSULT FACTORY FOR OPTIONAL / SPECIAL FEATURE

DIMENSIONS IN MM FOR REFERENCE ONLY